

BOTTOM

Timer section:-
J702 (BIAS pin)

CAN USE SMA C
IF Trap
Rx
GND
FROM C/O RELAY
CO-AX CABLES
Rx IN FROM C/O RELAY

13.8v DC input to tab.



13.8v DC output to PA
(via reverse polarity relay)



BIAS LINE TO PA's

USE THICK CABLE !

Spare
12/10
17/15
20
30
40
60
80
160

10V

CO-AX CABLE

6


FIT CONNECTOR TOP
FIT CONNECTOR BOTTOM


SHLD GND
LO OUT

CO-AX CABLE

SHLD GND

5



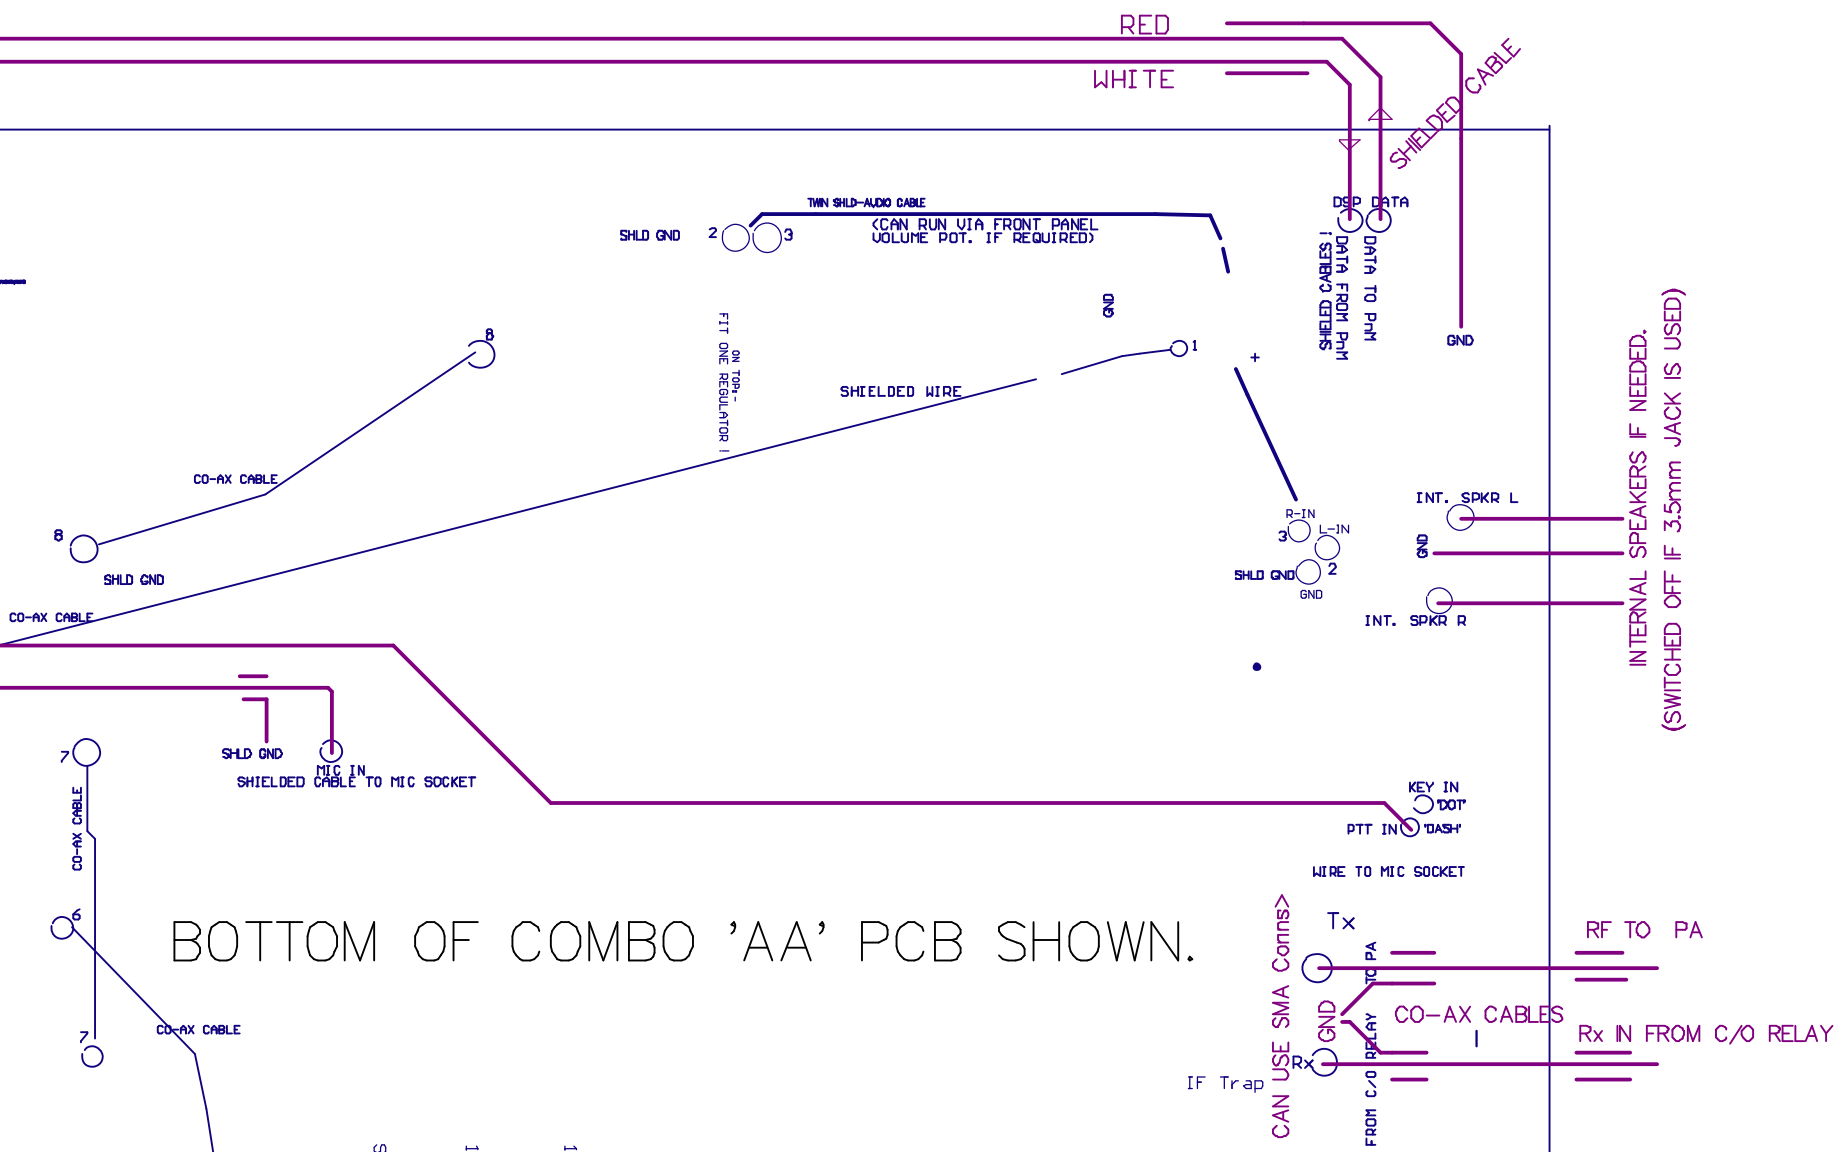

BOTTOM OF COMBO 'AA' PCB SHOWN.