IN THE BPF AREA, RESISTORS MARKED '*10K' ARE ACTUALLY 10k IN PARALLEL WITH 5K6 (OR USE 3K6 RES.

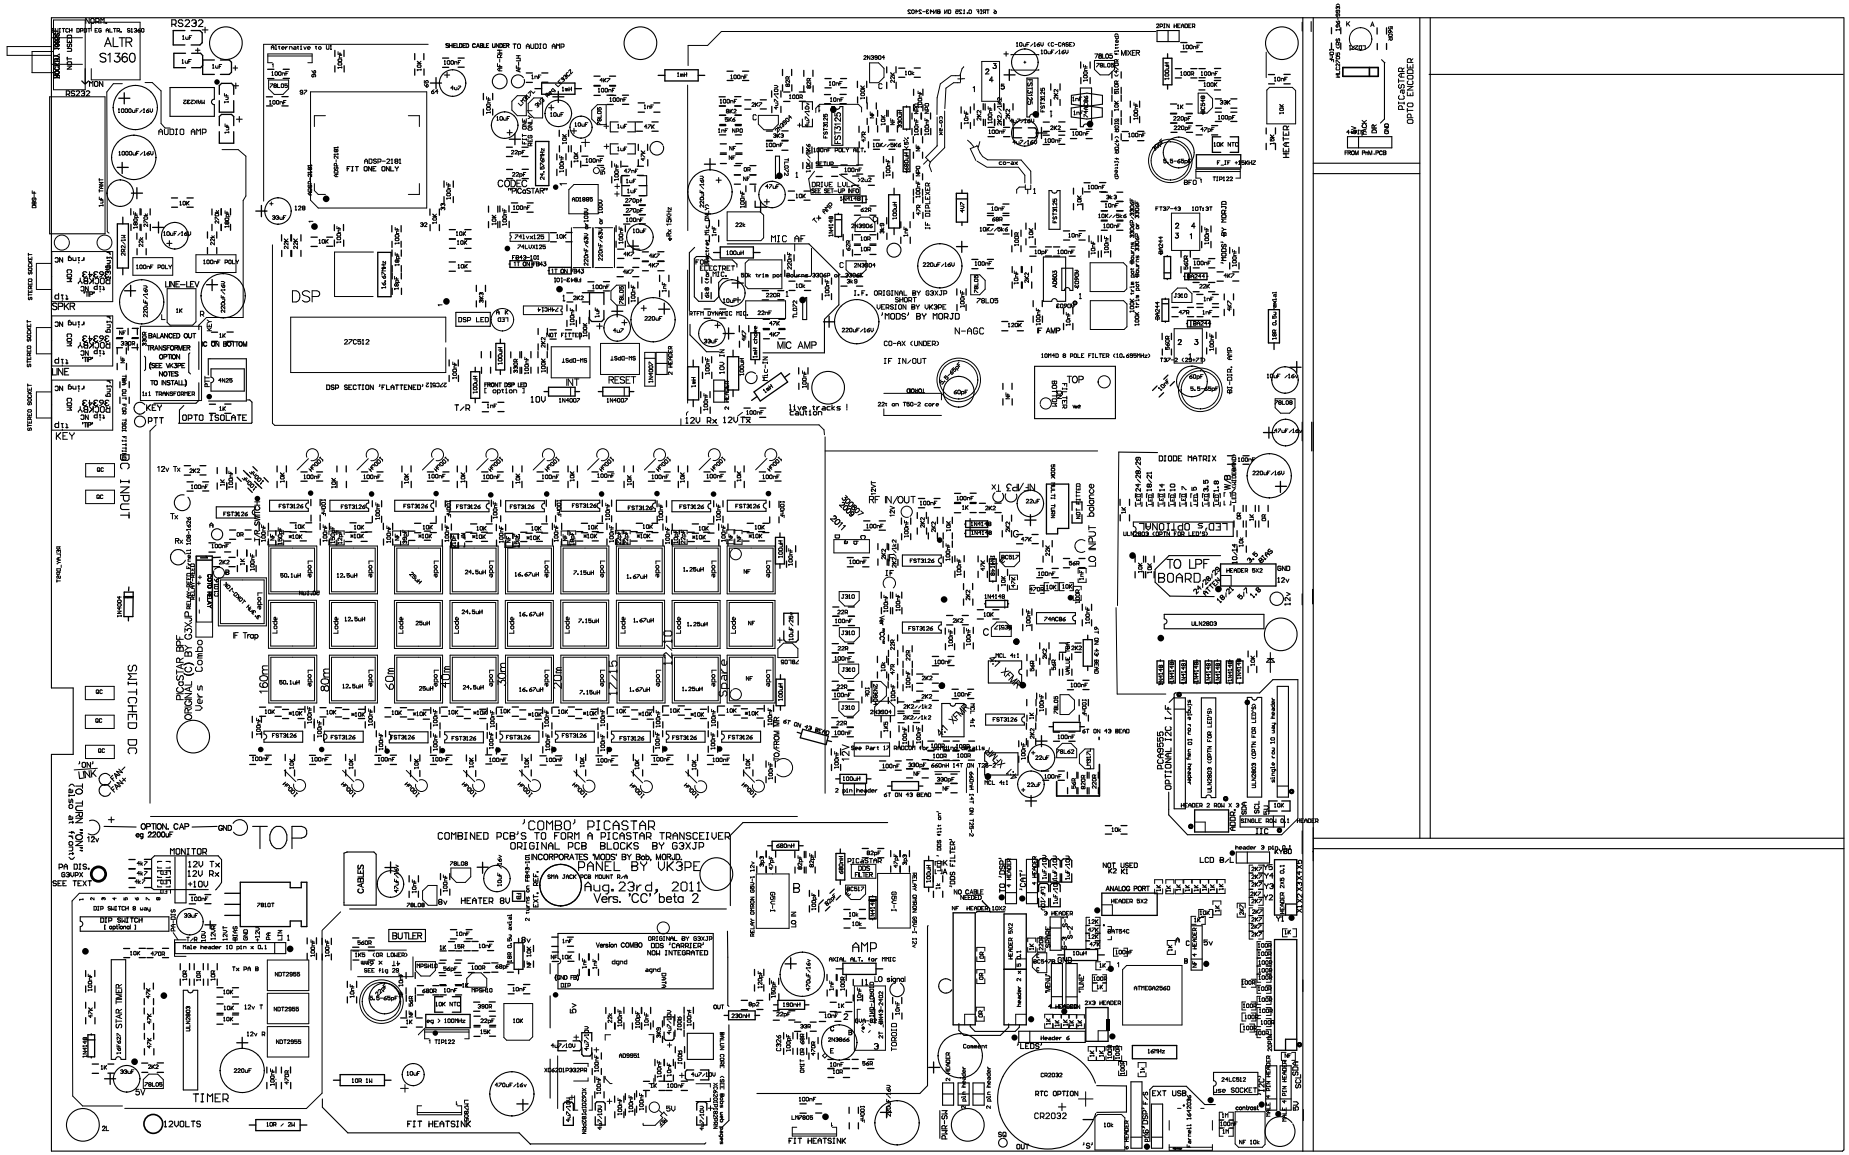

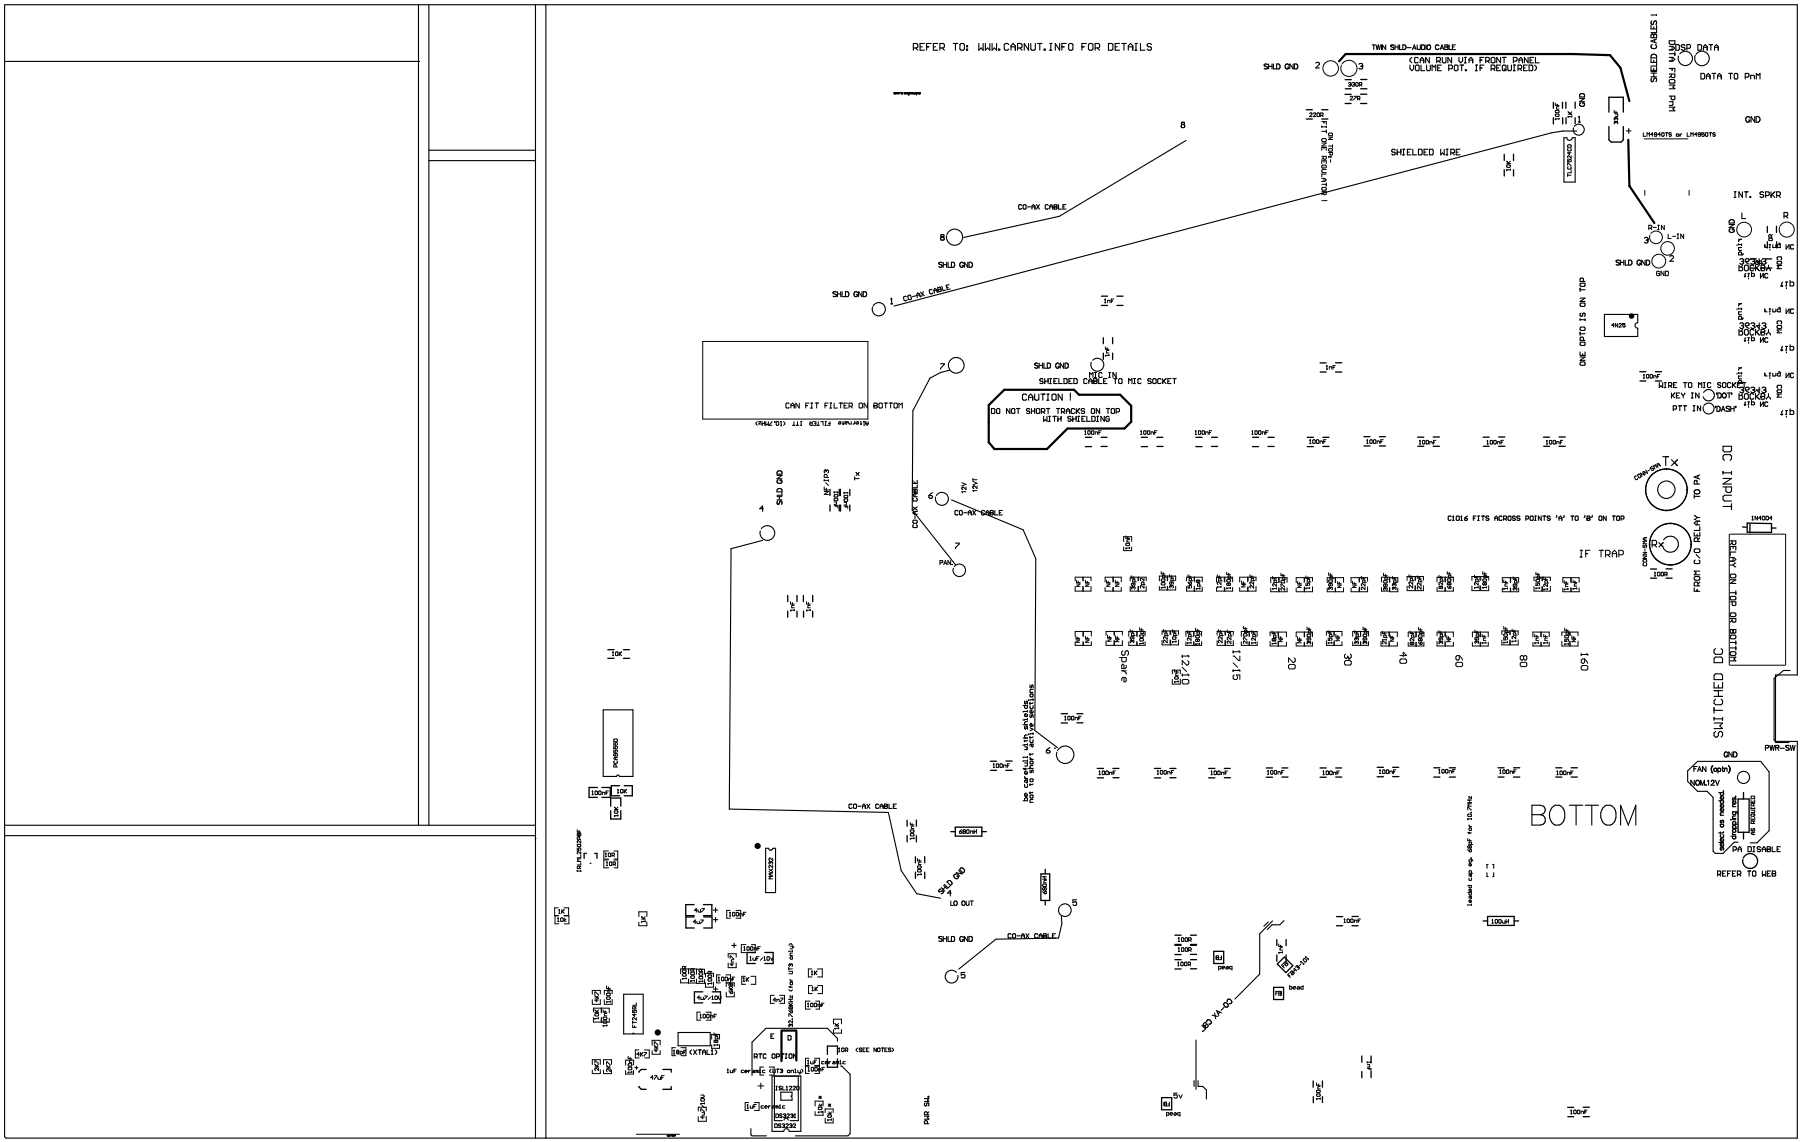
REFER TO: WWW.CARNUT.INFO FOR DETAILS
TWIN SHLD-AUDIO CABLE
(CAN RUN VIA FRONT PANEL VOLUME POT. IF REQUIRED)
SHLD GND
SHIELDED WIRE
CO-AX CABLE
SHIELDED CABLE TO MIC SOCKET
CAUTION !
DO NOT SHORT TRACKS ON TOP WITH SHIELDING
CAN FIT FILTER ON BOTTOM
ONE OPTO IS ON TOP
INT. SPKR
DSP DATA
DATA TO PnM
GND
SHIELDED CABLES !
FROM PnM
LM1840TS or LM4950TS
R-IN
L-IN
WIRE TO MIC SOCKET
KEY IN
PTT IN
DOT
DASH
C1016 FITS ACROSS POINTS 'A' TO 'B' ON TOP
IF TRAP
Spare
12/10
12/15
20
30
40
60
80
160
DC INPUT
SWITCHED DC
FROM C/O RELAY
TO PA
RELAY ON TO GO TO RADIO
PWR-SW
FAN (opt'n)
NOM.12V
PA DISABLE
REFER TO WEB
BOTTOM
RTC OPTION
(XTAL)
LO OUT
PWR SW.