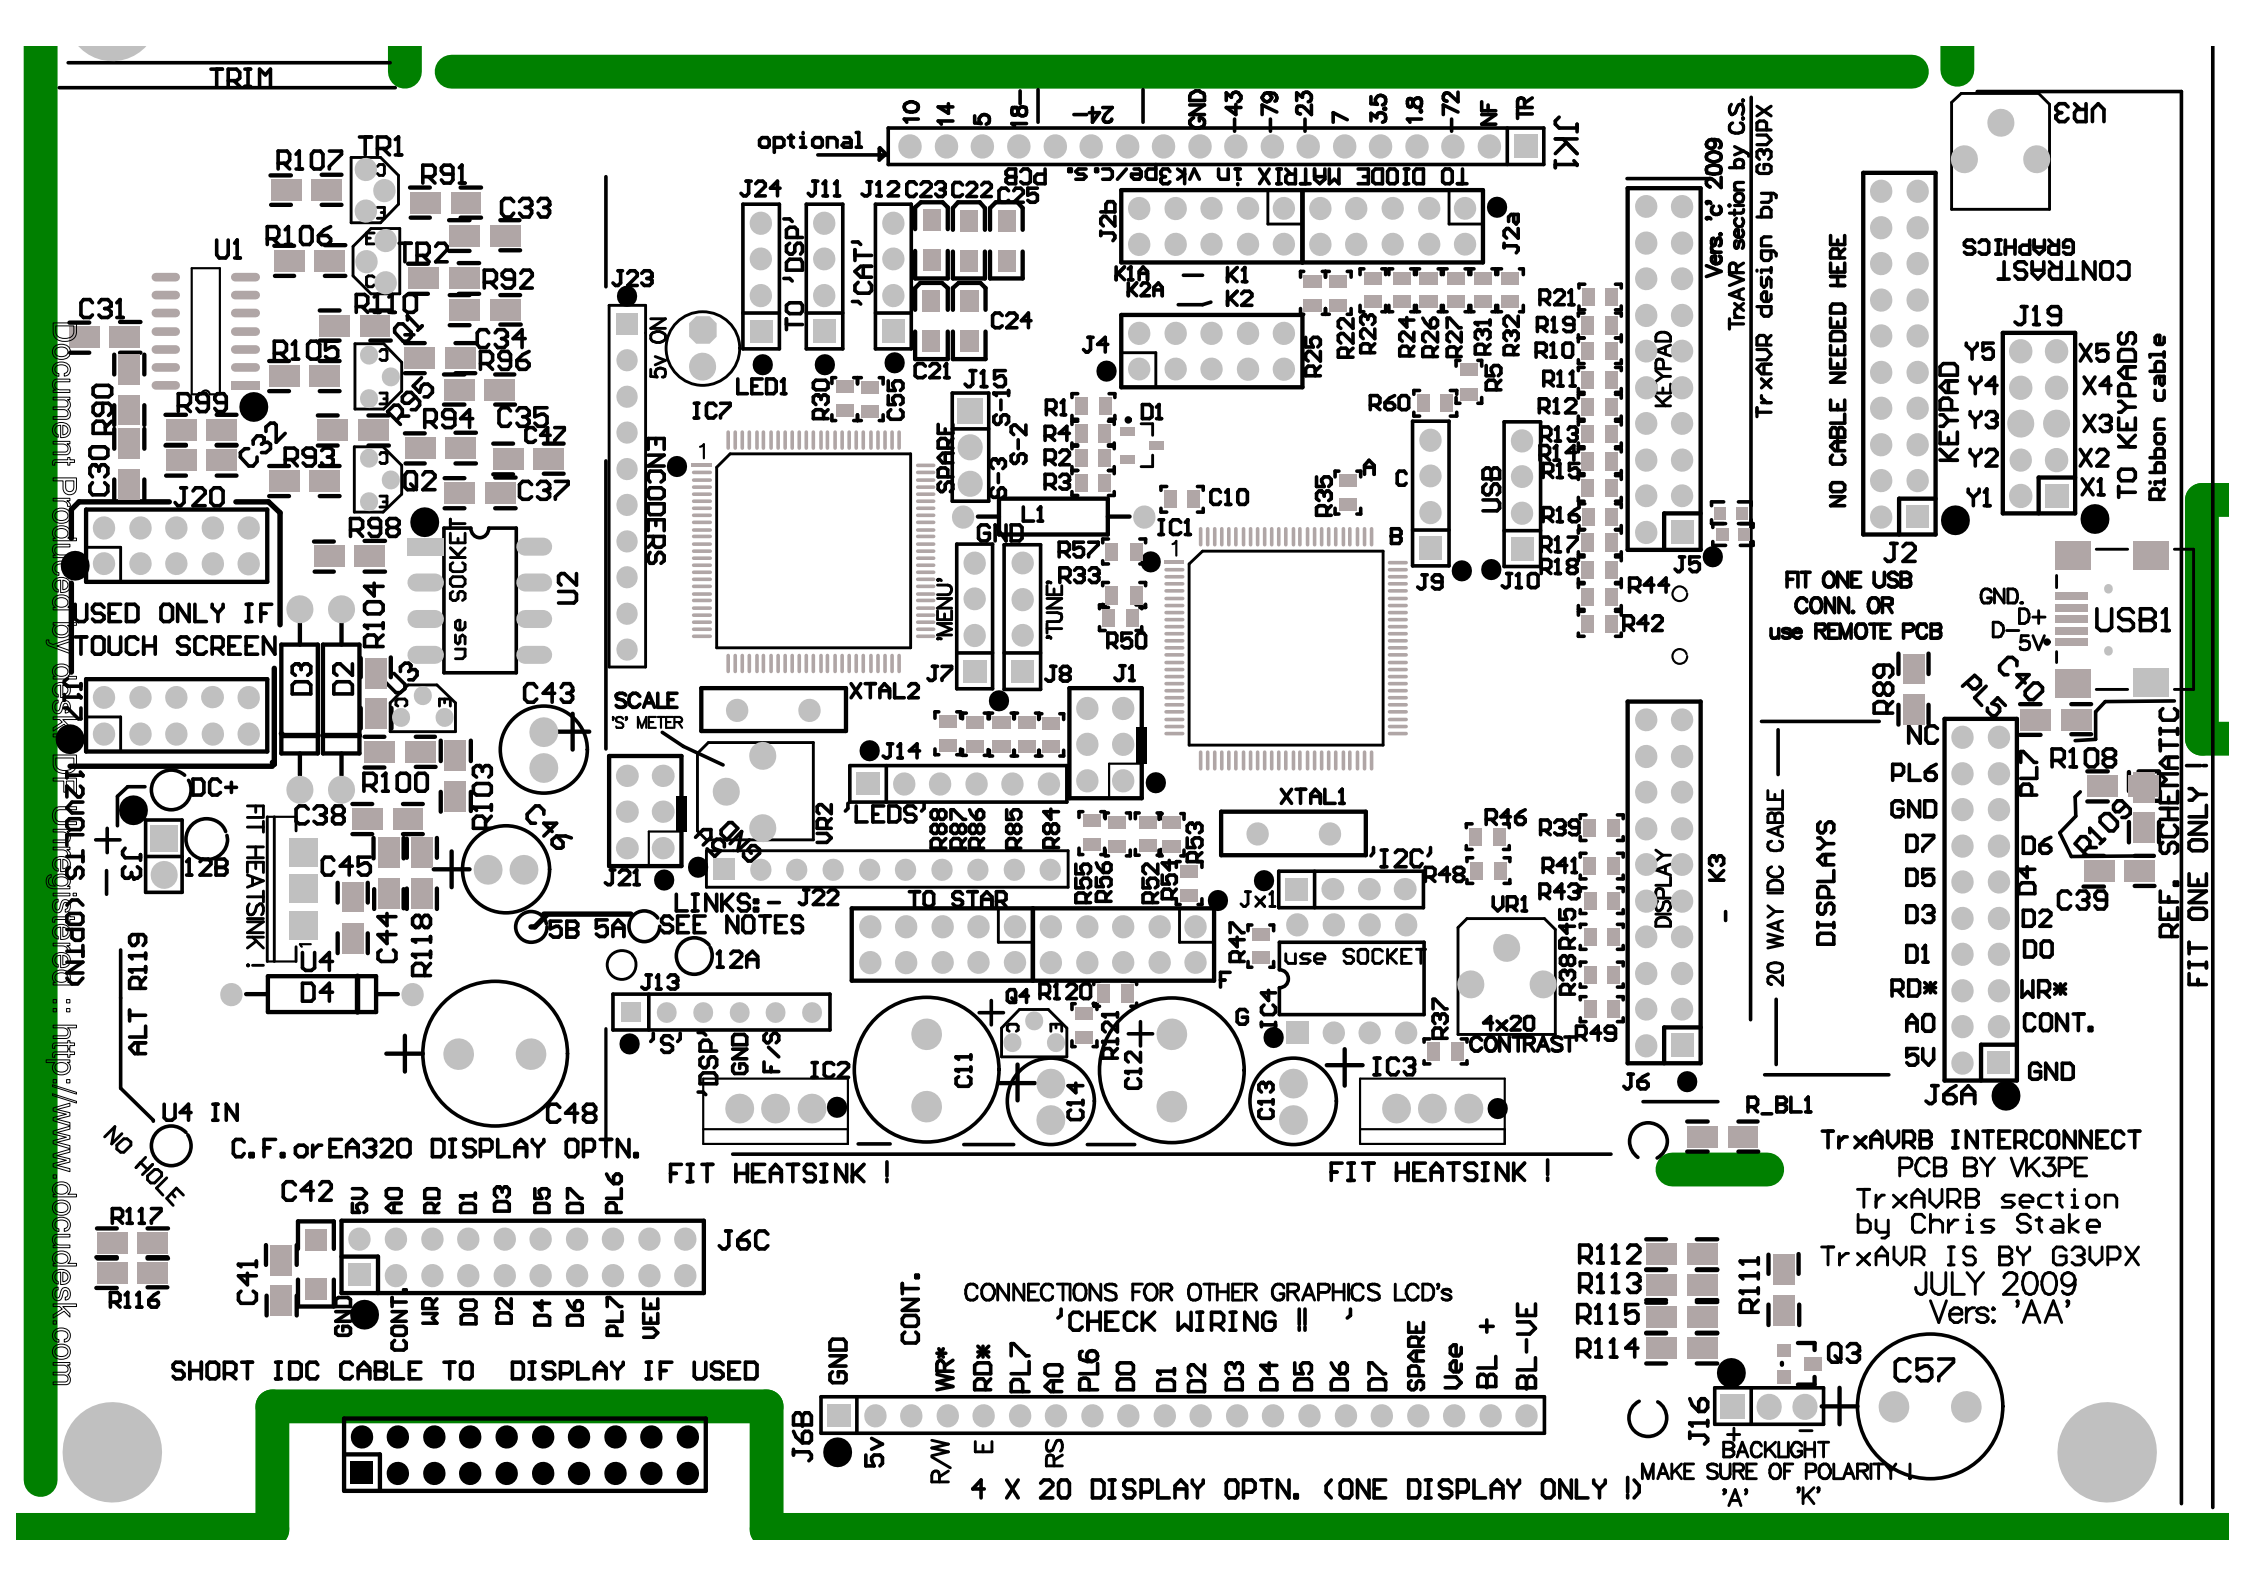
TRIM
optional
TO DIODE MATRIX in VK3DE/C.S.
Vers. 'c' 2009
TrxAVR design by G3UPX
TrxAVR design by C.S.
NO CABLE NEEDED HERE
CONTRAST
GRAPHICS
KEYPAD
TO KEYPADS
Ribbon cable
FIT ONE USB
CONN. OR
use REMOTE PCB
USB1
20 WAY IDC CABLE
DISPLAYS
REF. SCHEMATIC
FIT ONE ONLY !
USED ONLY IF
TOUCH SCREEN
use SOCKET
FIT HEATSINK
ALT R119
NO HOLE
U4 IN
C.F. or EA320 DISPLAY OPTN.
SHORT IDC CABLE TO DISPLAY IF USED
FIT HEATSINK !
FIT HEATSINK !
SCALE
'S' METER
LINKS:- SEE NOTES
TO STAR
'I2C'
'LEDS'
ENCODERS
'CAT'
'DSP'
'TUNE'
'MENU'
SPARE
USB
DISPLAY
4x20
CONTRAST
BACKLIGHT
MAKE SURE OF POLARITY !
'A' 'K'
CONNECTIONS FOR OTHER GRAPHICS LCD's
'CHECK WIRING !!'
4 X 20 DISPLAY OPTN. (ONE DISPLAY ONLY !)
TrxAVRB INTERCONNECT
PCB BY VK3PE
TrxAVRB section
by Chris Stake
TrxAVR IS BY G3UPX
JULY 2009
Vers: 'AA'
Document Produced by cadsoft EAGLE Version 4.16r2 Licensed to ... http://www.cadsoftusa.com

Document Produced by deskPDF Unregistered :: http://www.docudesk.com